

## Oil operated stainless steel deadweight tester

Deadweight testers are the basic primary standard for the accurate measurement of pressure. Our deadweight testers are used to generate a test pressure for the calibration of numerous pressure instruments or hydrostatic tests. No other device can match the stability, repeatability and accuracy of a deadweight tester.



### Hydraulic Operated Industrial Deadweight Tester

Ranges up to 1400 bar / 20.000 psi  
Portable and rugged  
Stainless steel construction  
Easy to use

Accuracy: 0,015% of reading

### Includes


Certificate traceable to national and international standards

Set of adapters: 1/2" BSP, 3/8" BSP  
1/4" BSP, 1/8" BSP

Nuto H32 DWT- oil (1/2 ltr.)

### Weights

All stainless steel  
Deliverable in kg, bar, psi, kgf/cm<sup>2</sup>,  
kPa, MPa and many other units  
Protected by a stainless steel carrying box

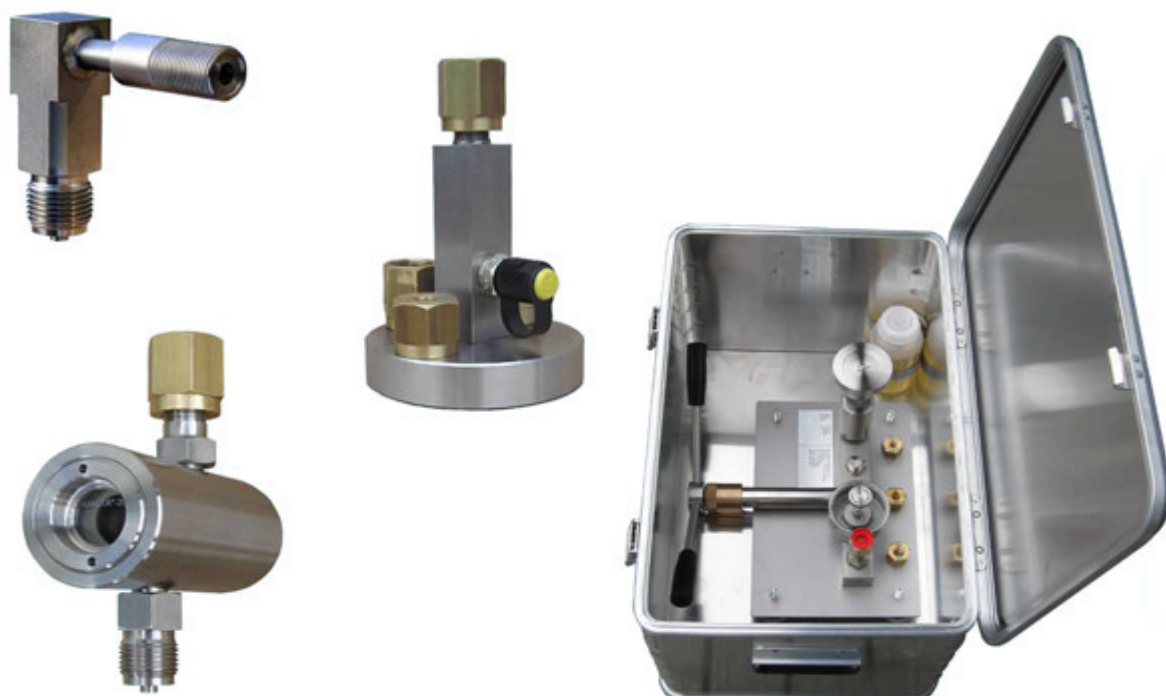

### Options

Square adapter 1/2" BSP- 3/8" BSP left male  
Connecting stand  
Dirt/moisture trap  
Aluminium transport box  
BSP and NPT connection sets